




Cod. GB 03/03

SMARTVISION

connection diagram CCTV Kits

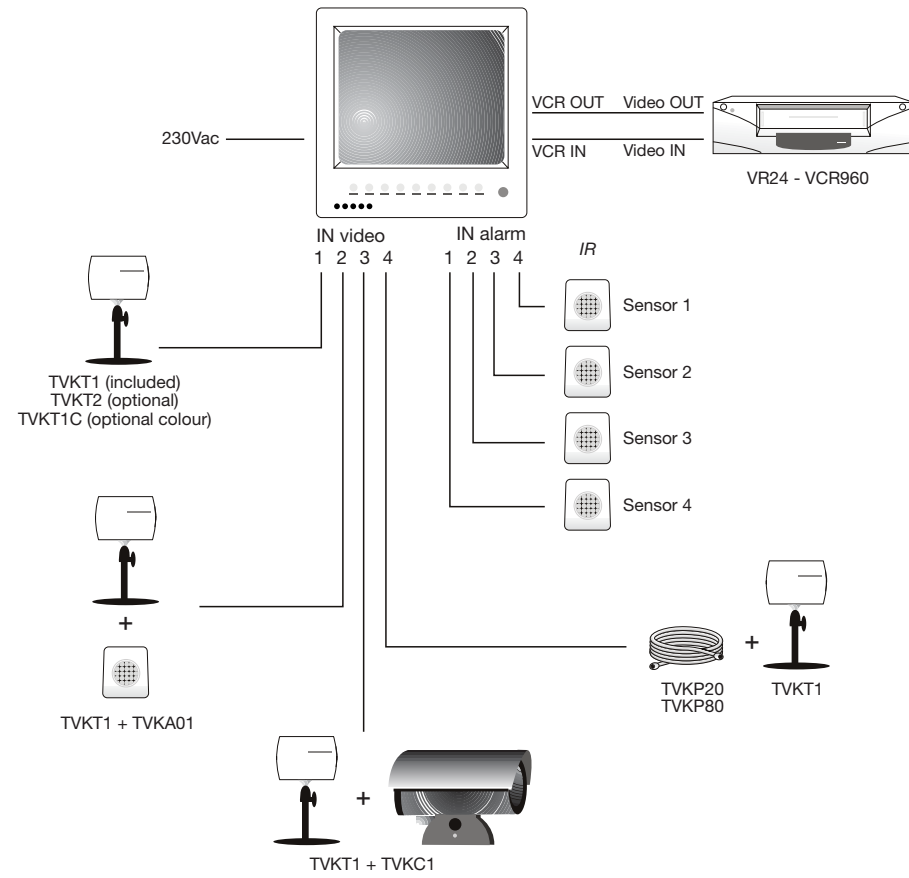

SMARTVISION

CCTV Kits

Security made Easy

ACI srl
Via Ezio Vanoni 3
60027 Osimo (AN) Italy

Tel. (+39)071.7202038
Fax (+39)071.7202037
info@acifarfisa.it
www.acifarfisa.it



capolinea.it

SMARTVISION CCTV Kits

An exhaustive offer of videosurveillance kits designed to satisfy medium complexity video control needs. A line of compact b/w and colour kits characterised by full performance and easy installation that can manage up to 4 cameras in cyclic switching or quad mode. Simple video, audio and anti-intrusion stations allow for powerful flexible solutions for a wide range of applications. The ideal solution for residential use, parking lots, department stores and shops.

- houses
- parking lots
- warehouses
- shops



KIT

■ An exhaustive offer of kits (b/w or colour of SMARTVISION series) designed to satisfy a wide range of videosurveillance requirements. Each kit includes monitor with built-in cyclic switcher, compact camera and connection cable. Possibility of adding up to 3 cameras with alarm if equipped with optional infrared sensor and establishing a bi-directional communication with the controlled area. Programmable sequence and scanning time of connected cameras.

	TVK10	TVK12	TVK10C
Monitor	10" b/w	12" b/w	10" colour
System	CCIR 297.000 pixel	CCIR 297.000 pixel	PAL 297.000 pixel
Power supply	230 Vac	90-250 Vac (free voltage)	90-250 Vac (free voltage)
Resolution	800 lines at centre	800 lines at centre	500 lines at centre
Inputs	4 mini DIN	4 mini DIN	4 mini DIN
Alarm Inputs	4	4	4
Alarm outputs	1	1	1
Alarm time	15 sec.	15 sec.	30 sec.
Audio	bi-directional	bi-directional	bi-directional
CCD sensor	1/3"	1/3"	1/3"
Lens	4,3mm fixed	4,3mm fixed	4,0mm
Iris	auto	auto	auto
Operating temperature	-10-50°C	-10-50°C	-10-50°C
Min. Light Illumination	0,1 Lux	0,1 Lux	3,5 Lux

QUAD KIT

■ The kit completes the range with cyclic switcher and offers the quad function. Only available in the 12" version, the kit includes monitor with built-in cyclic switcher and quad, compact camera and connection cable. It uses the same accessories as the SMARTVISION line and allows for connection of max. 4 alarmed cameras, choosing between simultaneous or sequential display with programmable scanning time. It is suitable in all the cases when an easy-to-install system is required, together with an evolved and flexible visualisation of the pictures.

	TVK12Q
Monitor	12" b/w
System	CCIR 297.000 pixel
Power supply	90-250 Vac (free voltage)
Resolution	800 lines at centre
Inputs	4 mini DIN
Alarm Inputs	4
Alarm outputs	1
Alarm time	15 sec.
Audio	Bi-directional
CCD sensor	1/3"
Lens	fixed 4,3mm
Iris	auto
Operating temperature	-10-50 °C
Min. Light Illumination	0,1 Lux



COMPLEMENTS

A wide range of CCTV complements that fulfils the SMARTVISION line, by matching the various requirements of videosurveillance. The accessories have been studied and designed for flexible solutions and to satisfy the different needs of single users or specific applications.

CAMERAS



TVKT1

B/W additional camera for TVK10, TVK12 or TVK12Q kits with fixed lens.

TVKT2

B/W additional camera for TVK10, TVK12 or TVK12Q kits with interchangeable lens (C mounting system).

TVKT1C

Colour additional camera for TVK10C with interchangeable lens (C mounting system).

HOUSINGS • SENSORS • CABLES



TVKC1

External housing for TVKT1, TVKT2 and TVKT1C cameras.

TVKA01

IR sensor for TVKT1, TVKT2 and TVKT1C cameras.


TVKP20

20 m. extension cable with adapter.

TVKP80

80 m. extension cable with adapter.

LENSES



TVKH04

Mounting system C
Focal length 4 mm
Max aperture ratio F 1,2
Angular vision of view 69°
Lens format 1/3"

TVKH06

Mounting system C
Focal length 6 mm
Max aperture ratio F 1,2
Angular vision of view 48,7°
Lens format 1/3"

TVKH08

Mounting system C
Focal length 8 mm
Max aperture ratio F 1,2
Angular vision of view 31°
Lens format 1/3"

TVKH12

Mounting system C
Focal length 12 mm
Max aperture ratio F 1,2
Angular vision of view 21°
Lens format 1/3"