


UNIVERSAL MODULE (UVM)

Supplied excluding lamp



High quality recessed luminaires available with a wide range of attachments including aluminium louvres and framed diffusers, to suit the requirements of any ceiling type. For ease of installation and relamping, louvre attachments hinge from the body of the luminaire.

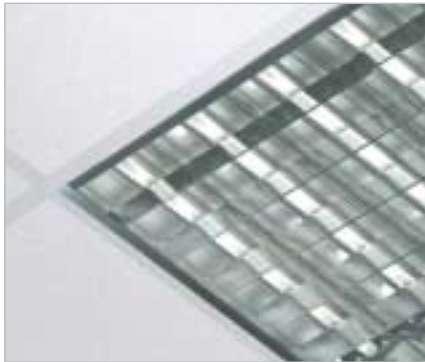

UVM WITH TRIDENT (TAL) SATIN LOUVRE



IP65 VERSION



IP40 VERSION

APPLICATION

For use in offices, shops, hotels etc, where a high quality appearance is required.

Fits any ceiling type (suspension brackets required for concealed and plasterboard ceiling types).

Louvre attachment hinges to main body of luminaire and fixes via shootbolt fasteners on 18 and 36 watt versions. On 58 and 70 watt variations, shoot bolts and safety cords are used.

SPECIFICATION

High Frequency Control Gear.

Complies with BSEN 60 598-1.

Rigid modular shape metalwork.

Fitted with fused terminal block.

Complies with latest energy requirements stipulated by building regulations (document L2 Building Regulations 2000).

IP65 version.

IP40 version.

Finished in the Fitzgerald patent **Pearl Rezi-Tex** coating. This attractive Pearl White colour provides a high quality appearance and a scratch resistant textured finish which ensures maximum protection during handling and installation.

Can be supplied complete with plugged modular mains cable assembly to assist with installation time and flexibility.

VARIATIONS

Can be supplied with digital electronic dimming control gear.

Emergency conversions. See page 5.38.

EXPORT




As for UK market, please specify voltage and frequency.

LOUVRES AND ACCESSORIES

See following pages a full range of attachments and more information on the louvres available for the UVM. Attachments are generally supplied in separate boxes, however, can be supplied from the factory packed in the luminaire if preferred.


UVM Plus +

The Universal Module UVM Plus features 'rear' reflectors and Light Bleed Rails for increased LOR (Light Output Ratio).

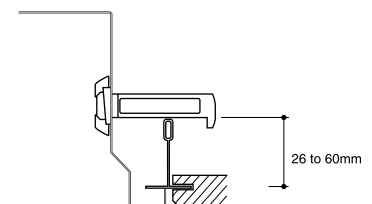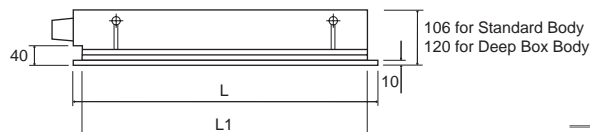



HINGED ACCESS – IP65 VERSION

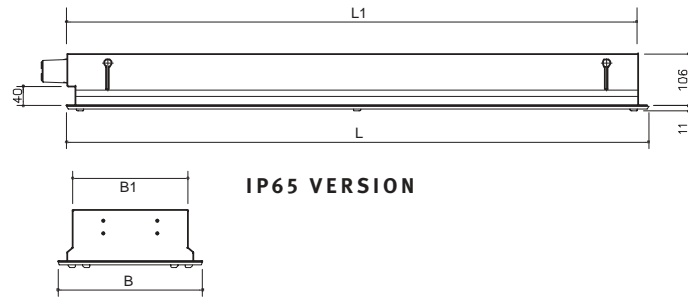

UNIVERSAL MODULE



ORDERING REFERENCE	LAMP DETAIL	LENGTH L (MM)	WIDTH B (MM)	CUT-OUT DIMENSIONS	
				LENGTH L1 (MM)	LENGTH B1 (MM)
BODY ONLY					
UVM218A/HF	2X18W	597	297	580	280
UVM236A/HF	2X36W	1197	297	1180	280
UVM258A/HF	2X58W	1497	297	1480	280
UVM270A/HF	2X70W	1797	297	1780	280
UVM218B/HF	2X18W	597	597	580	580
UVM236B/HF	2X36W	1197	597	1180	580
UVM258B/HF	2X58W	1497	597	1480	580
UVM270B/HF	2X70W	1797	597	1780	580
UVM318/HF	3X18W	597	597	580	580
UVM336/HF	3X36W	1197	597	1180	580
UVM358/HF	3X58W	1497	597	1480	580
UVM370/HF	3X70W	1797	597	1780	580
UVM418/HF	4X18W	597	597	580	580
UVM436/HF	4X36W	1197	597	1180	580
UVM458/HF	4X58W	1497	597	1480	580
UVM470/HF	4X70W	1797	597	1780	580
FOR USE WITH NAL LOW BRIGHTNESS LOUVRE					
UVM2PL34/HF	2X34W PL	597	597	580	580
UVM2PL40/HF	2X40W PL	597	597	580	580
UVM2PL55/HF	2X55W PL	597	597	580	580
PACKED WITH LOUVRE OR DIFFUSER					
UVM2D28/AFP	1X28W 2D	297	297	280	280
UVM2D38/AFP	1X38W 2D	297	297	280	280
UVM2D28/NAL	1X28W 2D	297	297	280	280
UVM2D38/NAL	1X38W 2D	297	297	280	280
DEEP BODY FOR USE WITH SAL CAT 2 LOUVRE					
UVM2PL34/D/HF	2X34W PL	597	597	580	580
UVM2PL40/D/HF	2X40W PL	597	597	580	580
UVM2PL55/D/HF	2X55W PL	597	597	580	580
UVM3PL34/D/HF	3X34W PL	597	597	580	580
UVM3PL40/D/HF	3X40W PL	597	597	580	580
FITTED WITH IP40 ATTACHMENT					
UVM236A/HF/40P	2X36W	1197	297	1180	280
UVM258A/HF/40P	2X58W	1497	297	1480	280
UVM270A/HF/40P	2X70W	1797	297	1780	280

ORDERING REFERENCE	LAMP DETAIL	LENGTH L (MM)	WIDTH B (MM)	CUT-OUT DIMENSIONS	
				LENGTH L1 (MM)	LENGTH B1 (MM)
UVM418/HF/40P	4X18W	597	597	580	580
UVM436/HF/40P	4X36W	1197	597	1180	580
UVM2PL34/D/HF/40P	2XPL34	597	597	580	580
UVM2PL40/D/HF/40P	2XPL40	597	597	580	580
UVM2PL55/D/HF/40P	2XPL55	597	597	580	580
UVM3PL34/D/HF/40P	3XPL34	597	597	580	580
UVM3PL40/D/HF/40P	3XPL40	597	597	580	580
UVM3PL55/D/HF/40P	3XPL55	597	597	580	580
FITTED WITH IP65 HINGED ATTACHMENT AND SUSPENSION BRACKET					
UVM236A/HF/65P	2X36W	1198	298	1180	280
UVM2PL34A/HF/65P	2XPL34	1198	298	1180	280
UVM2PL40A/HF/65P	2XPL40	1198	298	1180	280
UVM2PL55A/HF/65P	2XPL55	1198	298	1180	280
UVM2PL34B/HF/65P	2XPL34	598	598	580	580
UVM2PL40B/HF/65P	2XPL40	598	598	580	580
UVM2PL55B/HF/65P	2XPL55	598	598	580	580
UVM318B/HF/65P	3X18W	598	598	580	580
UVM418B/HF/65P	4X18W	598	598	580	580
UVM336C/HF/65P	3X36W	1198	598	1180	580
UVM436C/HF/65P	4X36W	1198	598	1180	580
UVM4PL40C/HF/65P	4XPL40	1198	598	1180	580
UVM4PL55C/HF/65P	4XPL55	1198	598	1180	580
SUPERIOR FORMAT FITTED WITH WIRE GUARD					
UVM/SP/4PL40B/HF/WG	4X40W PL	597	597	580	580
UVM/SP/4PL55B/HF/WG	4X55W PL	597	597	580	580
UVM/SP/4PL40A/HF/WG	4X40W PL	1197	297	1180	580
UVM/SP/4PL55A/HF/WG	4X55W PL	1197	297	1180	580
UVM002 SUSPENSION BRACKET- NOT ESSENTIAL FOR EXPOSED GRID CEILINGS					

For luminaire packed with attachment; add attachment suffix to ordering reference - i.e. For UVM418/HF with TRIDENT Cat 2 louvre add /TAL = UVM418/HF/TAL
Full attachment list shown on page 6.2.

ORDERING DATA

Electronic Digital Dimming – suffix /DTD

Electronic Digital SwitchDim – suffix /SD

Low Power Factor – insert F eg. UVMF 218A

Please check with Area Sales Office to ensure required variation available.

Supplied excluding lamps. PL lamp luminaires supplied complete with lamp.

For Luminaire packed with Louvre add appropriate suffix "/TAL" eg. UVM418/TAL for Trident louvre.

Suspension brackets need to be ordered separately.

Pack of 4 S150838 – (18-58W)

Pack of 6 S150878 – (70W)

For UVM Plus, add /Plus to ordering reference (UVM418/Plus & UVM436/Plus versions only).

N.B. Please see page 13.1 for circuit information.

N.B. IP40 and IP65 rated products are supplied complete with attachment.

IP65 rated louvred option with clear panels available for 418B and 436C variants, add suffix .../AAL

